13.3 Inch Panel Mount High-Brightness Industrial Touch Monitor (FHD)

13.3 inch a-Si TFT-LCD, 16:9 aspect ratio. Industrial die-casting aluminium bezel, IP65 waterproof front panel. PCAP multi-touch, 3mm tempered glass cover. Resolution 1920×1080 (FHD), Active Area 295(W)×166.6(H) mm, Unit Size 336.06×207.54×49 mm, Brightness 1000 cd/m² (LCD Panel) / 900 cd/m² (PCAP), VGA/HDMI+USB+12V DC, operating temp -20~60° C.

Specifications

Model Number	OB133PTK3-KW-FHD-1K	
Total parameter	Diagonal Size	13.3" a-Si TFT-LCD, LCM
	Aspect Ratio	16:9
	Enclosure Color	Black
	Interface	VGA/HDMI+USB+12V DC
	Speakers	Two 5W internal speakers (Option)
Mechanical	Unit Size (WxHxD mm)	336.06×207.54x49mm
	Panel Cutting Dimension	330.46×201.94mm
	VESA Holes (mm)	75×75mm
LCD Panel	Active Area(mm)	295(W)×166.6(H) mm
	Resolution	1920×1080 , FHD
	Dot Pitch(mm)	0.098×0.294 mm
	Viewing angle	85/85/85/85 (Typ.)(CR≥10)
	Contrast (Typ.) (TM)	800:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 1000 cd/m²
		PCAP: 900 cd/m²
	Response Time	30 (Typ.)(Tr+Td) ms
	Support Color	262K/16.2M 45% NTSC
	Backlight MTBF(hr)	WLED, 50K hours
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen
	Input Methods	Finger, Gloved hand, Passive stylus
	Number of Touches	Single - Touch and 10 Multi Touch
	Glass Thickness	3mm Tempered Glass
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP,Windows 7,Windows 10
		Windows 11, Linux, Android
Power	Power Consumption (W)	DC 12V /4A ,DC head 5.5x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	-20～60°C
	Storage Temp.	-20～70°C
	Operating RH:	20%～80%
	Storage RH:	10%～90%
Accessories	Packing List	1 x Power Adapter, 1 x Power Cable
		1 x USB Cable, 1 x HDMI Cable
		Rear Mount brackets
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime
Certificate	Lab Approval	CE, CB, EMC

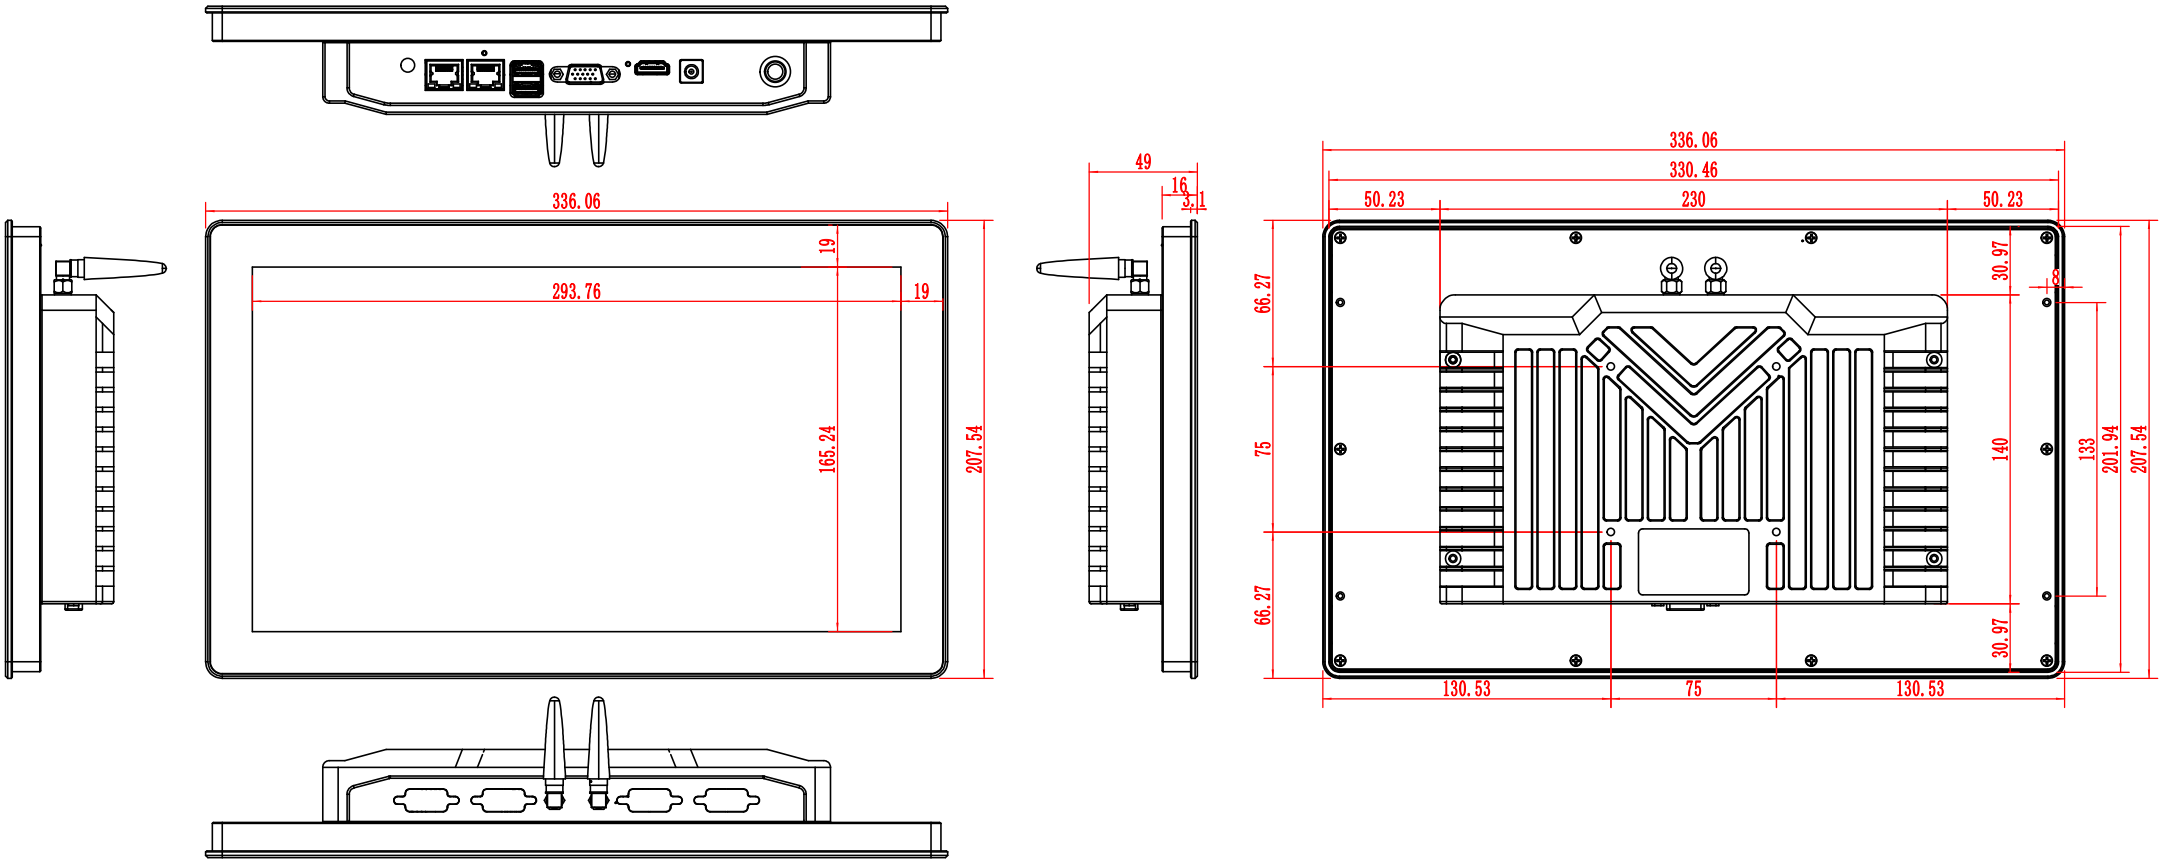
336.06
19
293.76
19
165.24
207.54
49
16
3.1
336.06
330.46
50.23
230
50.23
66.27
75
66.27
30.97
8
140
30.97
133
201.94
207.54
130.53
75
130.53