(mark)	(revised contents)	(signature)	(Date)

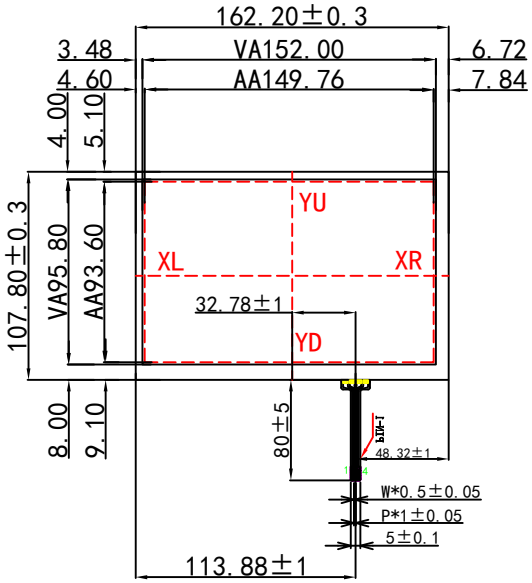



Contact Side:

CONNECTOR PINOUT

PIN NO.	DESIGNATION
1	XL
2	YU
3	XR
4	YD

DETAIL-B

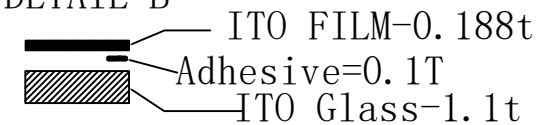

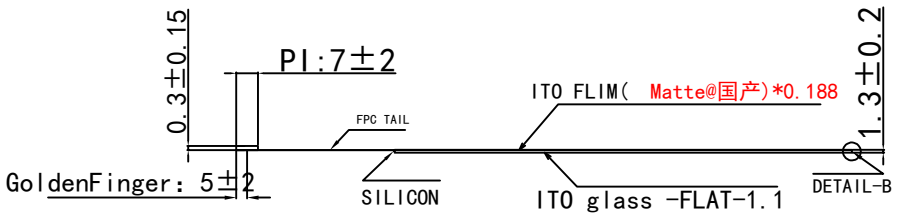

lnstruction:

1. Type:Film to Glass+ FPC-TS-F4024S0835-A
2. Operating Voitage:3~7V
3. Response Time:≤15ms
4. Storage Temperature:-20℃~+70℃/20%~80%
5. Operation Temperature/Humidity:-10℃~+50℃/20%~80%
6. Hitting Life:>1,000,000 Times.100gf Force
7. Writting Life>100.000 Times100gf Force
8. Connect Material:FPC

9. Film Thickness:0.188mm
10. Glass Thickness:1.1mm
11. Light Transmission:78%±8%
12. Force:100g or less
13. Linearity:≤1.5%
14. Insulation:≥20MΩ
15. Surface Hardness≥3H(pencil)
16. Unmarked tolerance as from±0.5 to±0.3

OBEY CO., LIMITED

TITLE: 产品编号	TS070A4K021-A		paul@obeycrop.com sandy@obeycrop.com		
Customerid: 客户编号	T0-80-066-X	Designed By: 设 计		View:	
Unit: 单 位	mm	Checked By: 审 核			
Date: 日 期	2021.03.03	Approved By: 批 准		Scale:	1:1