标记(mark)	修改内容(revised contents)	签名(signature)	日期(Date)
A	首次发行		

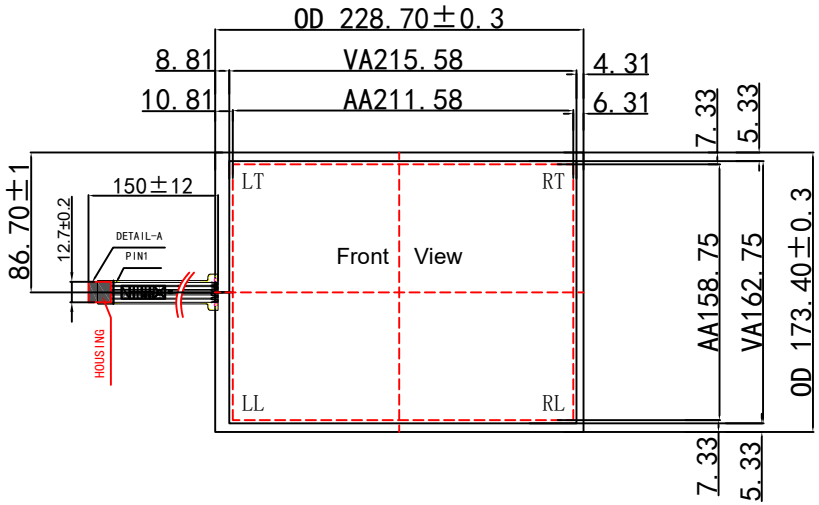

Contact Side:

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	RT
2	RL
3	SG
4	LT
5	LL

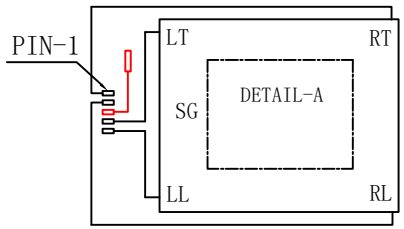

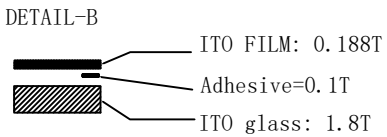

Instruction:

1. Type:Film to Glass+FPC-TS-F5015D1440-B,贴固定条TS150A5B009
2. Operating Voitage:3~7V
3. Response Time:≤15ms
4. Storage Temperature:-20℃~+50℃/20%~80%
5. Operation Temperature/Humidity:-10℃~+50℃/20%~80%
6. Hitting Life:>1,000,000 Times.100gf Force
7. Writting Life>100,000 Times100gf Force
8. Connect Material:FPC
9. Film Thickness:0.188mm
10. Glass Thickness:1.8mm
11. Light Transmission:78%±12%
12. Force:100g or less
13. Linearity:≤2.5.%
14. Insulation:≥20MΩ
15. Surface Hardness≥3H(pencil)
16. Unmarked tolerance as ±0.5



HOUSING--DETAIL-A

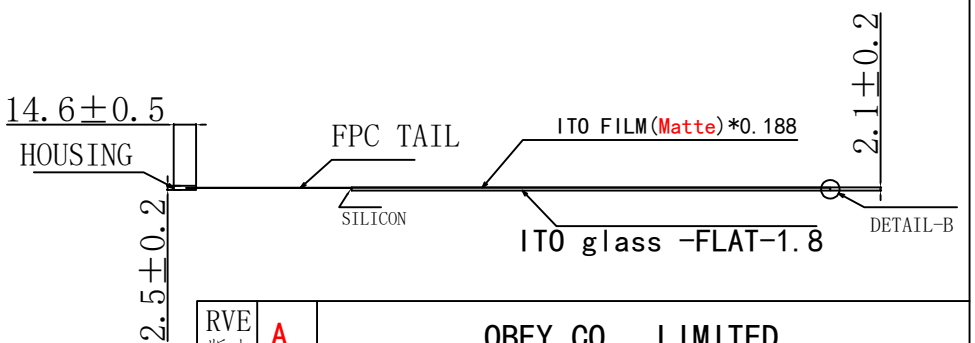

RVE 版本	A	OBEY CO., LIMITED			
TITLE: 产品编号	TS104A5B013-A	paul@obeycrop.com sandy@obeycrop.com			
Customerid: 客户编号	WD104F5RB-006	Designed By: 设 计		View: 投影方式	
Unit: 单 位	mm	Checked By: 审 核			
Date: 日 期	2016-10-20	Approved By: 批 准		Scale: 比 例	1:1