10.4 inch LCD Touch Monitor, Panel Mount

Industrial Die-Casting Aluminium Bezel, Surface IP65 Waterproof
Projected Capacitive Touch screen, Multi Touch, Tempered Clear Glass Cover
LCD Resolution 1024*768, Brightness 350cd/m2, VGA/HDMI, USB Touch, 12V DC

Specifications

Model Number	OB104PTM3-KW-HR	
Total parameter	Diagonal Size	10.4 inch a-Si TFT-LCD , LCM
	Aspect Ratio	4:3
	Enclosure Color	Black
	Interface	VGA/HDMI+USB+12V DC
	Speakers	Two 5W internal speakers (Option)
Mechanical	Unit Size (WxHxD mm)	259.8×207×51mm
	Panel Cutting Dimension	253.8×201mm
	VESA Holes (mm)	75×75mm
LCD Panel	Active Area(mm)	209 (H)×157(V) mm
	Resolution	1024(RGB)×768, XGA
	Dot Pitch(mm)	0.088×0.264 mm
	Viewing angle	70/70/60/70 (Typ.)(CR≥10)
	Contrast	800:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 350 cd/m² (Typ.)
		PCAP: 320 cd/m² (Typ.)
	Response Time	30 (Typ.)(Tr+Td)
	Support Color	262K/16.2M 50% NTSC
	Backlight MTBF(hr)	WLED [6S4P] , 30K hours
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen
	Input Methods	Finger, Gloved hand, Passive stylus
	Number of Touches	Single - Touch and 10 Multi Touch
	Glass Thickness	3mm Tempered Glass
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP,Windows 7,Windows 10
		Windows 11, Linux, Android
Power	Power Consumption	13W
	Input Interface	DC 12V /4A ,DC head 5.5x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	0～50°C
	Storage Temp.	-20～60°C
	Operating RH:	20%～80%
	Storage RH:	10%～90%
Accessories	Packing List	1 x Power Adapter, 1 x Power Cable
		1 x USB Cable, 1 x HDMI Cable
		Rear Mount brackets
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime
Certificate	Lab Approval	CE, CB, EMC

www.obtouch.com

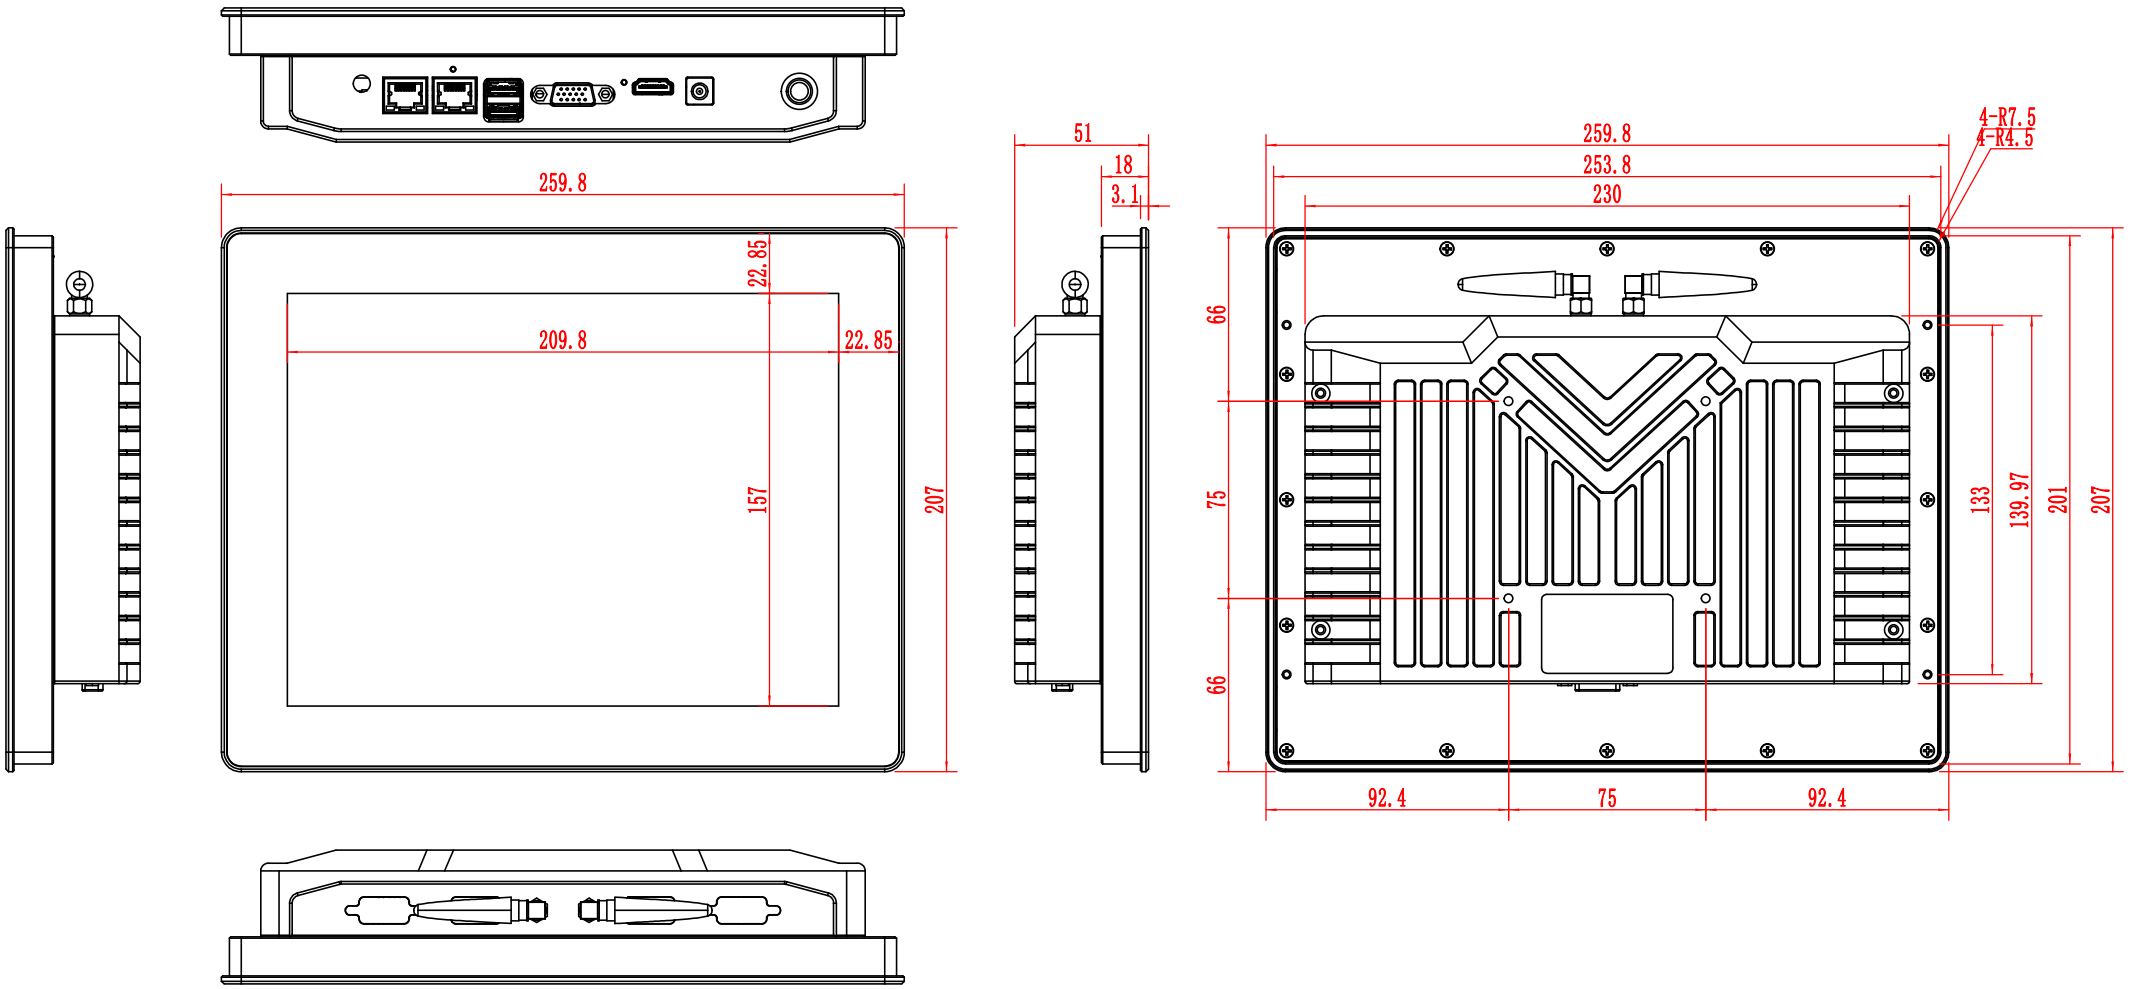
259.8
22.85
209.8
22.85
157
207
51
18
3.1
4-R7.5
4-R4.5
259.8
253.8
230
66
75
66
133
139.97
201
207
92.4
75
92.4