13.3 inch LCD Touch Monitor, Panel Mount

Industrial Die-Casting Aluminium Bezel, Surface IP65 Waterproof
Projected Capacitive Touch screen, Multi Touch, Tempered Clear Glass Cover
LCD Resolution 1366*768, Brightness 250cd/m2, VGA/HDMI, USB Touch, 12V DC

Specifications

Model Number	OB133PTK3-KW	
Total parameter	Diagonal Size	13.3" a-Si TFT-LCD, LCM
	Aspect Ratio	16:9
	Enclosure Color	Black
	Interface	VGA/HDMI+USB+12V DC
	Speakers	Two 5W internal speakers (Option)
Mechanical	Unit Size (WxHxD mm)	336.06×207.54x49mm
	Panel Cutting Dimension	330.46×201.94mm
	VESA Holes (mm)	75×75mm
LCD Panel	Active Area(mm)	295(W)×166.6(H) mm
	Resolution	1366(RGB)×768, WXGA
	Dot Pitch(mm)	0.098×0.294 mm
	Viewing angle	85/85/85/85 (Typ.)(CR≥10)
	Contrast	800:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 250 nits
		PCAP: 200 nits
	Response Time	30 (Typ.)(Tr+Td) ms
	Support Color	262K/16.2M 45% NTSC
	Backlight MTBF(hr)	WLED , 20K hours , With LED Driver
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen
	Input Methods	Finger, Gloved hand, Passive stylus
	Number of Touches	Single - Touch and 10 Multi Touch
	Glass Thickness	3mm Tempered Glass
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP,Windows 7,Windows 10
		Windows 11, Linux, Android
Power	Power Consumption	15W
	Input Interface	DC 12V /4A ,DC head 5.5x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	0～50°C
	Storage Temp.	-20～60°C
	Operating RH:	20%～80%
	Storage RH:	10%～90%
Accessories	Packing List	1 x Power Adapter, 1 x Power Cable
		1 x USB Cable, 1 x HDMI Cable
		Rear Mount brackets
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime
Certificate	Lab Approval	CE, CB, EMC

www.obtouch.com

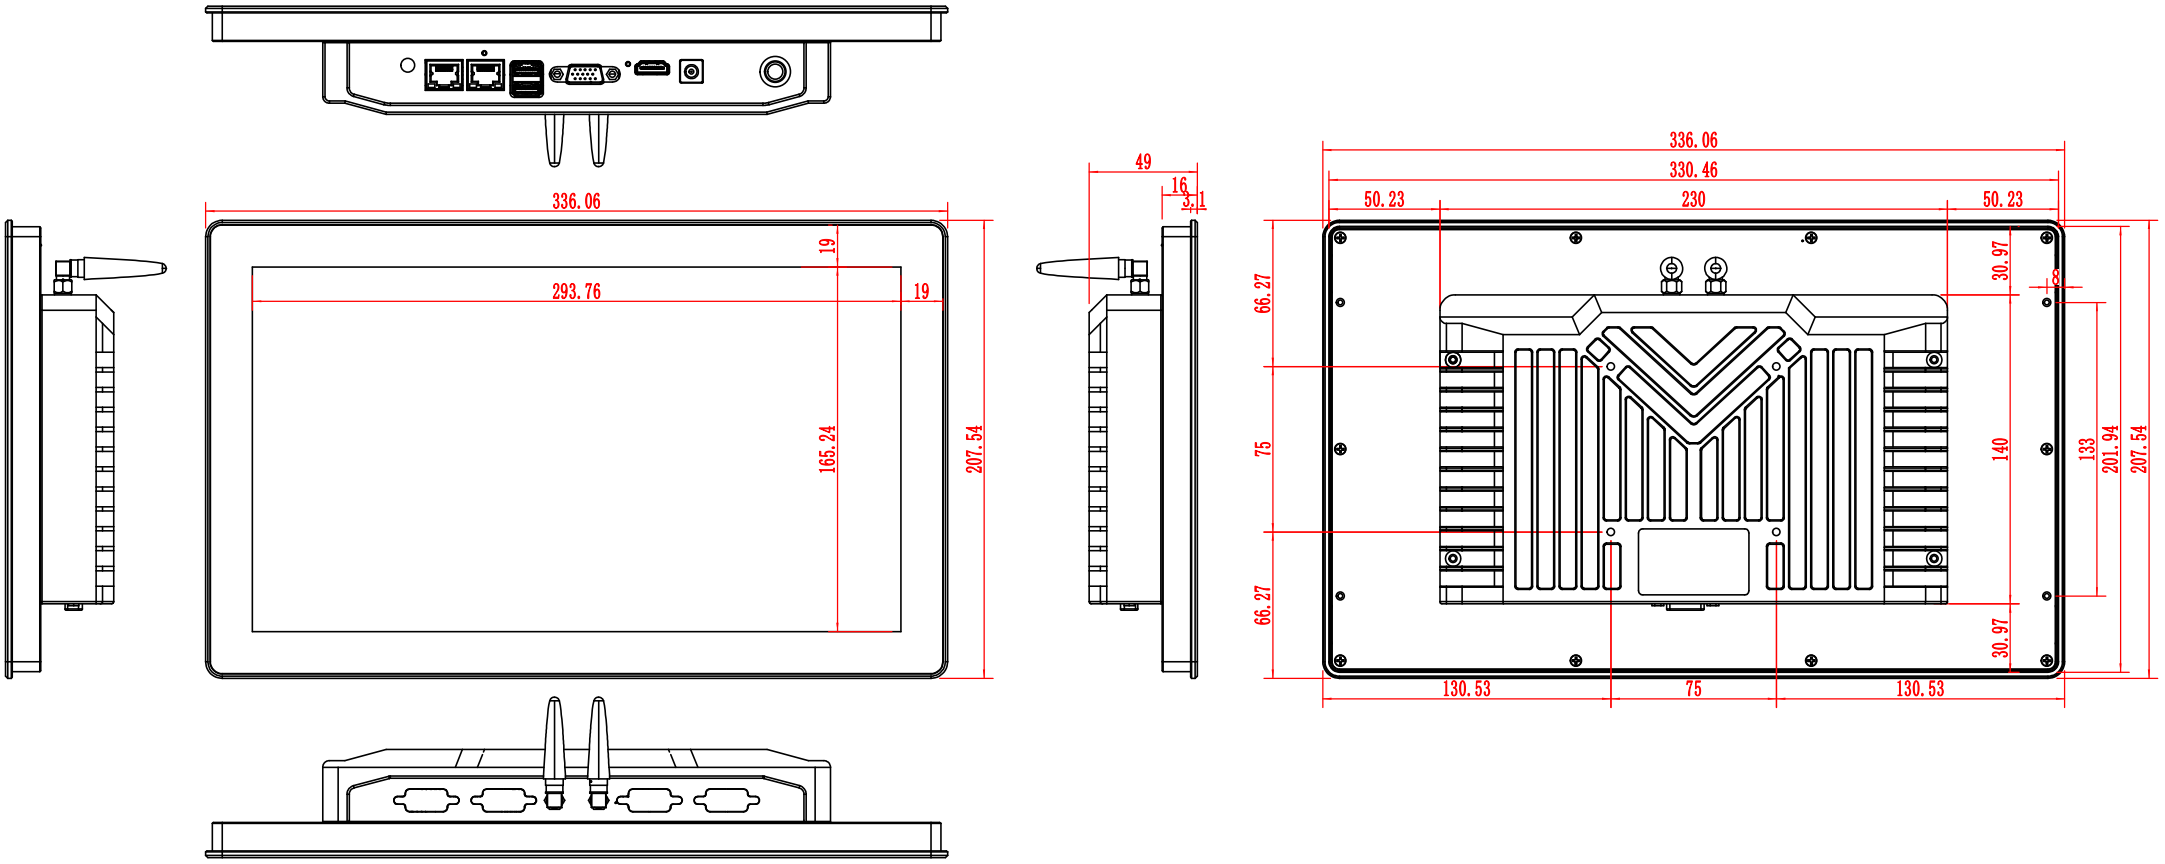
336.06
19
293.76
19
165.24
207.54
49
16
3.1
336.06
330.46
50.23
230
50.23
66.27
75
66.27
30.97
8
140
30.97
133
201.94
207.54
130.53
75
130.53