18.5 inch LCD Touch Monitor, Panel Mount

Industrial Die-Casting Aluminium Bezel, Surface IP65 Waterproof
Projected Capacitive Touch screen, Multi Touch, Tempered Clear Glass Cover
LCD Resolution 1366*768, Brightness 250cd/m2, VGA/HDMI, USB Touch, 12V DC

Specifications

Model Number	OB185PTK3-KW	
Total parameter	Diagonal Size	18.5 inch a-Si TFT-LCD, LCM
	Aspect Ratio	16:9
	Enclosure Color	Black
	Interface	VGA/HDMI+USB+12V DC
	Speakers	Two 5W internal speakers (Option)
Mechanical	Unit Size (WxHxD mm)	456.26×277.34×53.5mm
	Panel Cutting Dimension	450.26×271.34mm
	VESA Holes (mm)	75x75mm,100x100mm
LCD Panel	Active Area(mm)	407.96(H)×229.04(V) mm
	Resolution	1366(RGB)×768 [WXGA]
	Dot Pitch(mm)	0.100×0.300 mm (H×V)
	Viewing angle	85/85/80/80 (Typ.)(CR≥10)
	Contrast	1000:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 250 nits
		PCAP: 220 nits
	Response Time	3.6/1.4 (Typ.)(Tr/Td) (ms)
	Support Color	16.7M 72% NTSC
	Backlight MTBF(hr)	WLED [7S4P] , 30K hours
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen
	Input Methods	Finger, Gloved hand, Passive stylus
	Number of Touches	Single - Touch and 10 Multi Touch
	Glass Thickness	3mm Tempered Glass
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP,Windows 7,Windows 10
		Windows 11, Linux, Android
Power	Power Consumption	20W
	Input Interface	DC 12V /4A ,DC head 5.5x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	0～50°C
	Storage Temp.	-20～60°C
	Operating RH:	20%～80%
	Storage RH:	10%～90%
Accessories	Packing List	1 x Power Adapter, 1 x Power Cable
		1 x USB Cable, 1 x HDMI Cable
		Rear Mount brackets
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime
Certificate	Lab Approval	CE, CB, EMC

www.obtouch.com

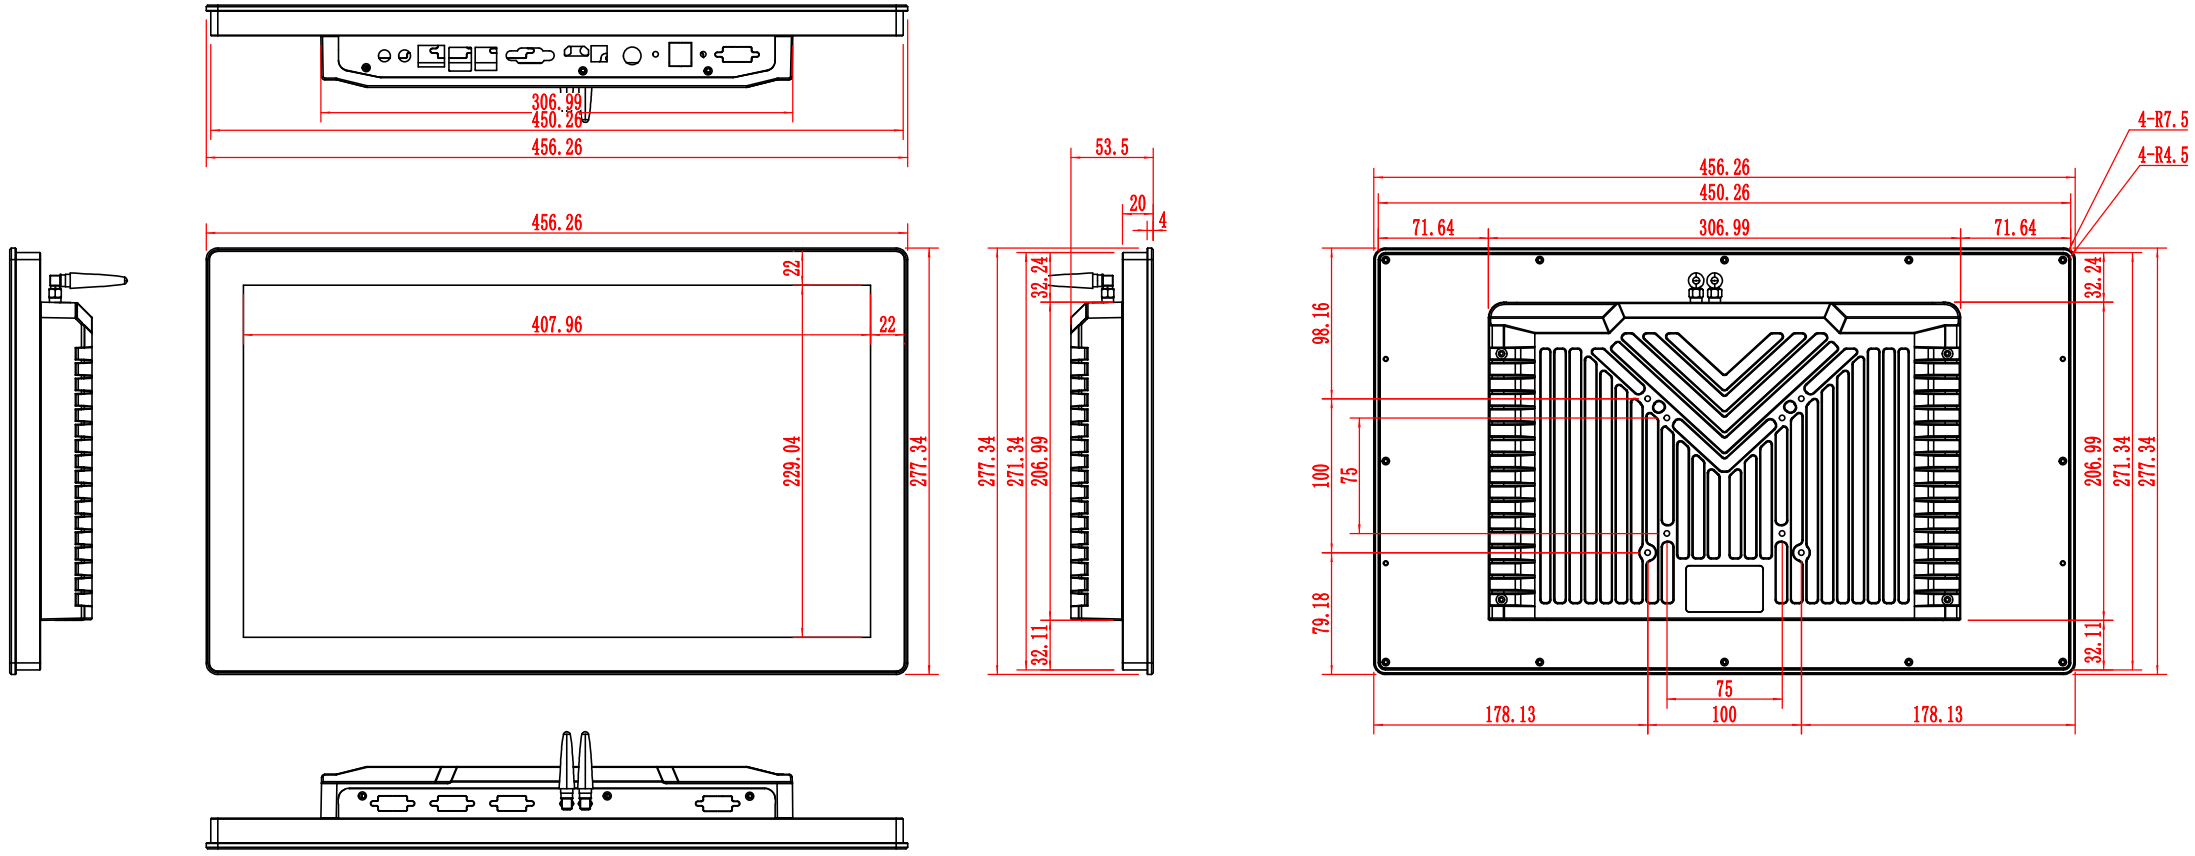
306.99
450.26
456.26
53.5
20
4
456.26
22
407.96
22
229.04
277.34
277.34
271.34
206.99
32.24
32.11
4-R7.5
4-R4.5
456.26
450.26
71.64
306.99
71.64
98.16
100
75
79.18
206.99
271.34
277.34
32.24
32.11
75
100
178.13
178.13