19 inch LCD Touch Monitor, Panel Mount

Industrial Die-Casting Aluminium Bezel, Surface IP65 Waterproof
Projected Capacitive Touch screen, Multi Touch, Tempered Clear Glass Cover
LCD Resolution 1280*1024, Brightness 350cd/m2, VGA/HDMI, USB Touch, 12V DC

Specifications

Model Number	OB190PTM3-KW	
Total parameter	Diagonal Size	19" a-Si TFT-LCD , LCM
	Aspect Ratio	5:4
	Enclosure Color	Black
	Interface	VGA/HDMI+USB+12V DC
	Speakers	Two 5W internal speakers (Option)
Mechanical	Unit Size (WxHxD mm)	422.78×347.83×53.5mm
	Panel Cutting Dimension	416.78×341.83mm
	VESA Holes (mm)	75x75mm,100x100mm
LCD Panel	Active Area(mm)	374.78(H)×299.83(V)
	Resolution	1280(RGB)×1024 [SXGA] @60Hz
	Dot Pitch(mm)	0.098×0.294 mm
	Viewing angle	85/85/80/80
	Contrast	1000:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 350 cd/m² (Typ.)
		PCAP: 320 cd/m² (Typ.)
	Response Time	3/7ms
	Support Color	16.7M , 72% (CIE1931)
	Backlight MTBF(hr)	WLED [12S4P] , 30K hours
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen
	Input Methods	Finger, Gloved hand, Passive stylus
	Number of Touches	Single - Touch and 10 Multi Touch
	Glass Thickness	3mm Tempered Glass
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP,Windows 7,Windows 10
		Windows 11, Linux, Android
Power	Power Consumption	24W
	Input Interface	DC 12V /4A ,DC head 5.5x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	0～50°C
	Storage Temp.	-20～60°C
	Operating RH:	20%～80%
	Storage RH:	10%～90%
Accessories	Packing List	1 x Power Adapter, 1 x Power Cable
		1 x USB Cable, 1 x HDMI Cable
		Rear Mount brackets
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime
Certificate	Lab Approval	CE, CB, EMC

www.obtouch.com

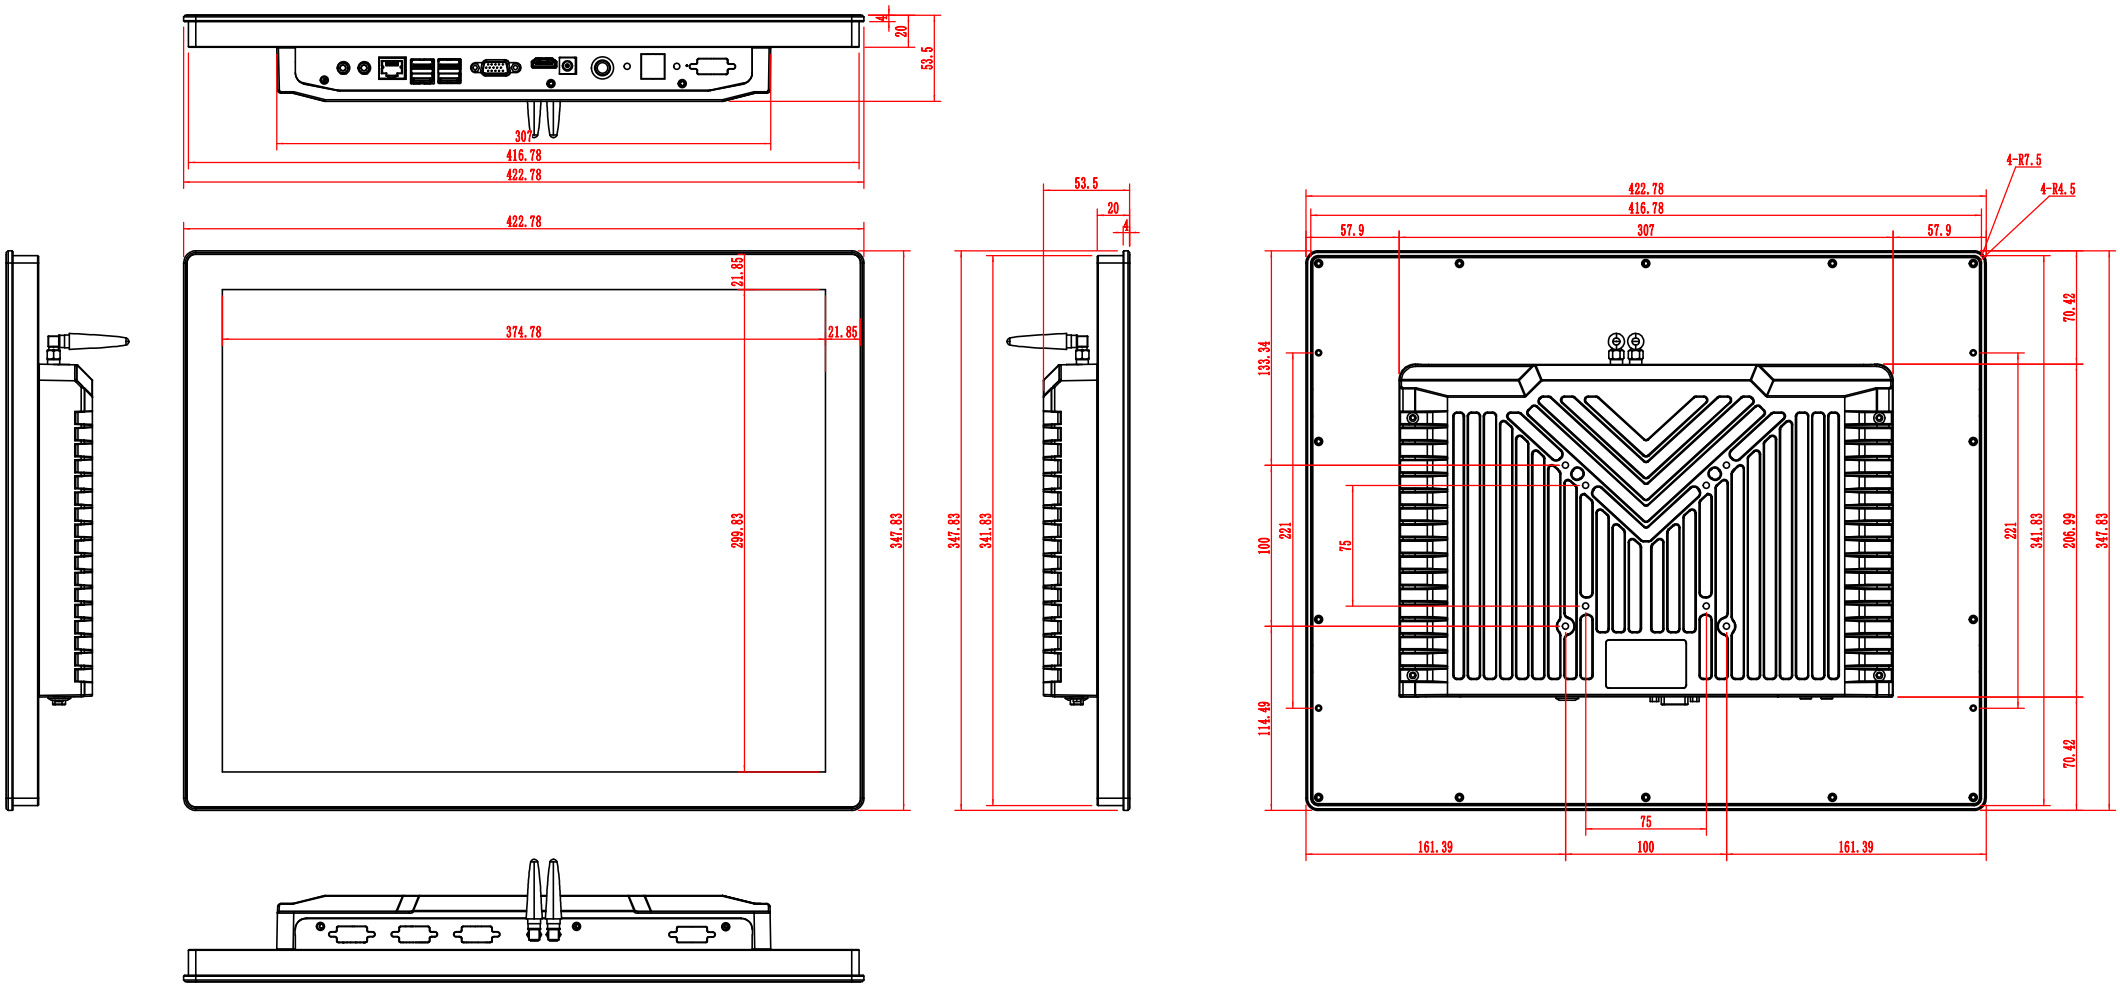
4
20
53.5
307
416.78
422.78
422.78
21.85
374.78
21.85
299.83
347.83
53.5
20
4
347.83
341.83
4-R7.5
4-R4.5
422.78
416.78
57.9
307
57.9
133.34
100
221
75
114.49
70.42
221
341.83
206.99
347.83
70.42
75
161.39
100
161.39